


**TA7227P**

T-74-05-01

**5.5W DUAL POWER AMPLIFIER**  
**CAR RADIO, CAR STEREO OUTPUT**  
**AUDIO POWER AMPLIFIER**

- Dual Mode or Bridge Connection Mode Type.
- Some Protection Circuits Included  
 Thermal Protection, Over Voltage Protection,  
 Current Limiter, BTL DC Short Protection.
- Wide Operating Voltage Range :  $V_{CC(opr)}=8\sim 18V$
- A Chassis Mounting is Easily Designed Using SIP  
 (Single in Line Package) 12 Pins.
- Very Few External Parts.
- This Power IC Obtains High Output Power by  
 Bridge Connection :  $P_{OUT}=17W$  (Typ.)  
 at  $V_{CC}=13.2V$ ,  $R_L=4\Omega$ ,  $THD=10\%$
- Dual Mode : Minimum Load Impedance is 2 ohm.
- BTL Mode : Minimum Load Impedance is 4 ohm.

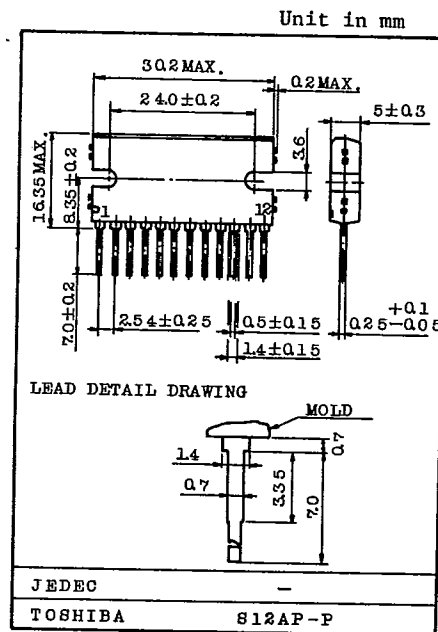

**MAXIMUM RATINGS ( $T_a=25^{\circ}C$ )**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Supply Voltage	$V_{CC}$ surge	45	V
D.C Supply Voltage (30 sec)	$V_{CC}$ DC	25	V
Operating Supply Voltage	$V_{CC}$ opr	18	V
Output Current (peak)	$I_O$ (peak)	4.5	A
Power Dissipation	$P_D$	25	W
Operating Temperature	$T_{opr}$	-30 ~ 75	$^{\circ}C$
Storage Temperature	$T_{stg}$	-55 ~ 150	$^{\circ}C$

(Note) Less than 2 ohm (Dual mode) or 4 ohm (BTL mode) load impedance is not recommended from allowable power dissipation and over current limiter.

**TOSHIBA**

TA7227P

T-74-05-01

## ELECTRICAL CHARACTERISTICS

(Unless otherwise specified,  $V_{CC}=13.2V$ ,  $R_L=4\Omega$ ,  $R_g=600\Omega$ ,  $f=1kHz$ ,  $T_a=25^\circ C$ ,  
Dual mode (Fig.-1) or BTL connection (Fig.-2) )

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Quiescent Current	ICCQ	-	-	-	85	200	mA	
Output Power	P <sub>OUT</sub>	-	THD=10%	Dual	4.5	5.5	-	W
				BTL	14	17.0	-	
Output Power	P <sub>O2</sub>	-	THD=10%, $R_L=2\Omega$	Dual	-	8.0	-	W
Maximum Output Power	P <sub>OM</sub>	-	$V_{IN}=100mV_{rms}$	Dual	-	9.0	-	W
				BTL	-	30	-	
Total Harmonic Distortion	THD	-	P <sub>OUT</sub> =1W	Dual	-	0.2	1.5	%
				BTL	-	0.3	1.5	
Voltage Gain	G <sub>V</sub>	-	$V_{OUT}=0dBm$ (Note 1)	52.5	54.0	55.5	dB	
Channel Balance	$\Delta G_V$	-	$V_{OUT}=0dBm$	-	0	$\pm 1.0$	dB	
Channel Separation	CT	-	$V_{OUT}=0dBm$	-	-45	-	dB	
Ripple Rejection	R.R.	-	f=100Hz	Dual	-	-20	-	dB
				BTL	-	-29	-	
Input Resistance	R <sub>IN</sub>	-	-	20	35	50	k $\Omega$	
Output Noise Voltage	V <sub>NO</sub>	-	$R_g=10k\Omega$ , BW=50~20kHz	-	1.0	2.0	mV <sub>rms</sub>	

Note 1. Voltage gain  $G_V$  is fixed by internal resistance. The typical voltage gain is 54dB. When you need lower voltage gain than 54dB, connect resistance R(\*) which is shown on Fig.-1 or Fig.-2. To get stable action of IC, voltage gain  $G_V$  minimum limit is 40dB.






- Capacitor C<sub>5</sub>, C<sub>6</sub> are demanded good temperature characteristic and we recommend large value capacitors more than 0.1 $\mu F$  to avoid application problems.
- Don't short output PINS (PIN2 and PIN10) to the GND directly, this situation gives the damage to the IC.  
To avoid destruction of IC, please put in inductance (about 1.5 $\mu H$ ) between output pin and load. (BTL Application mode)

AUDIO LINEAR IC



# TA7227P







T-74-05-01

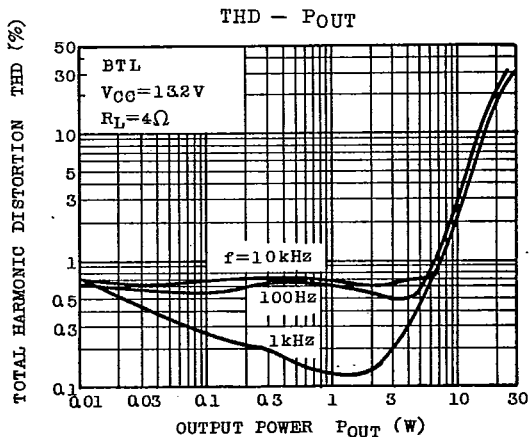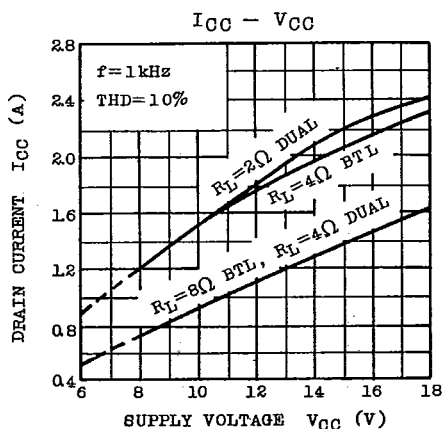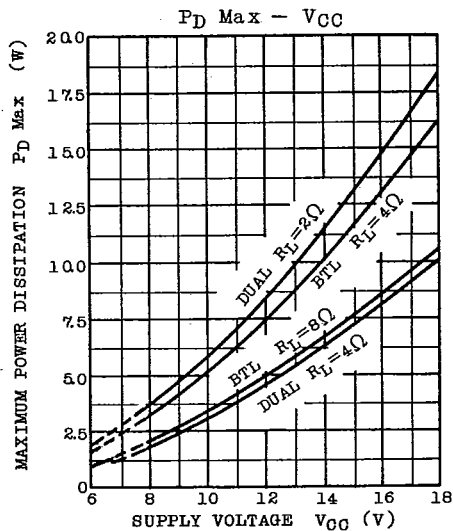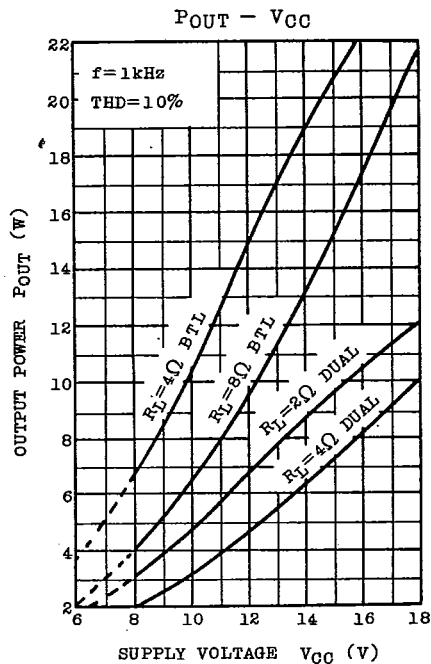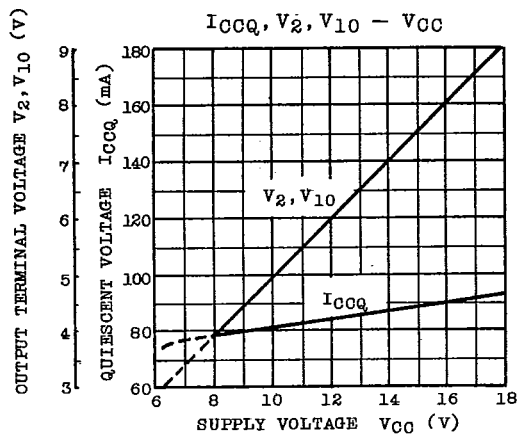

AUDIO LINEAR IC








**TA7227P**

T-74-05-01

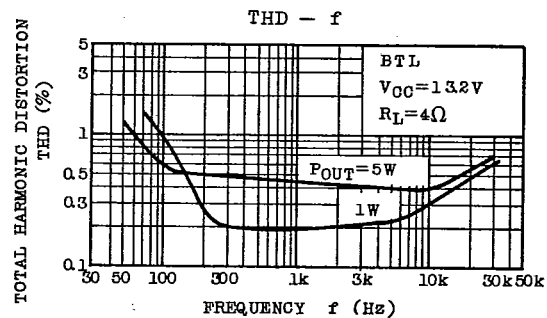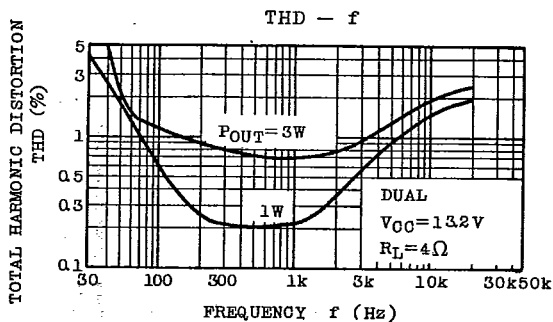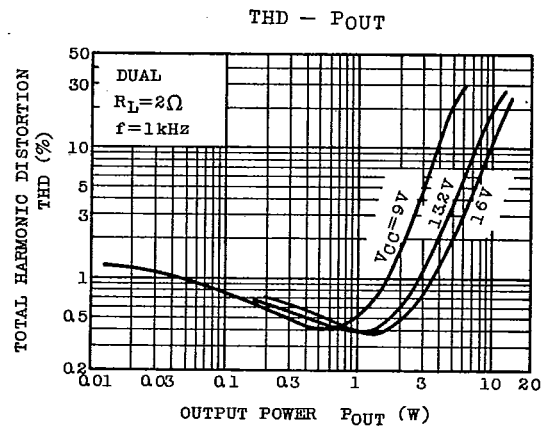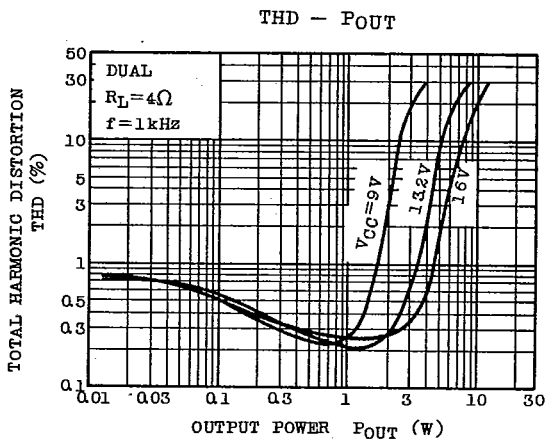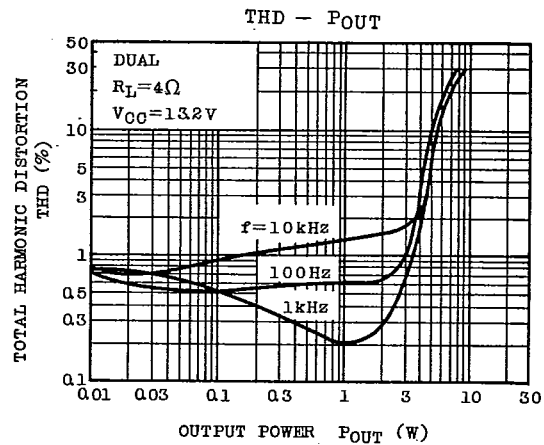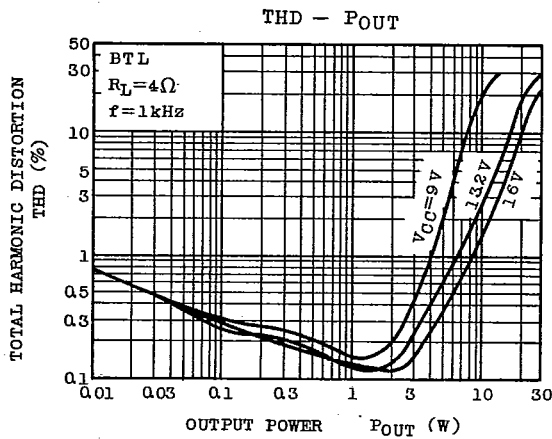

# TA7227P

T-74-05-01

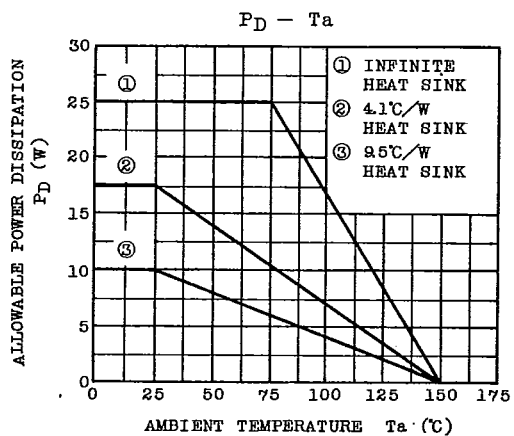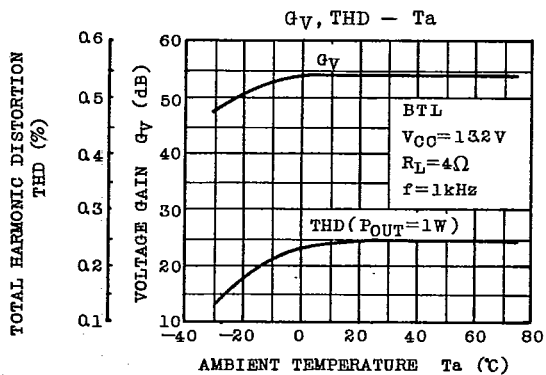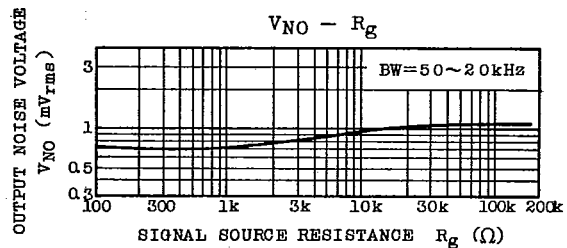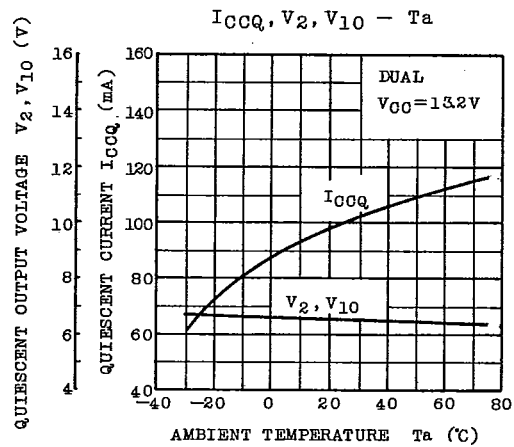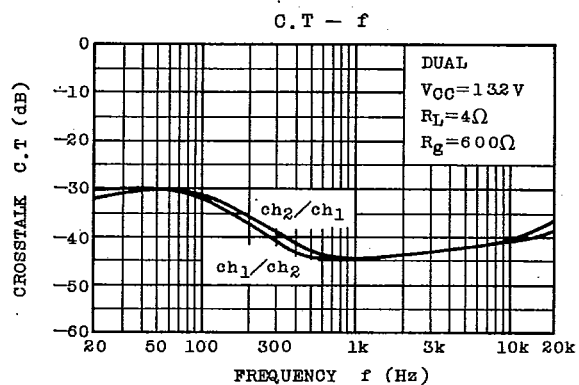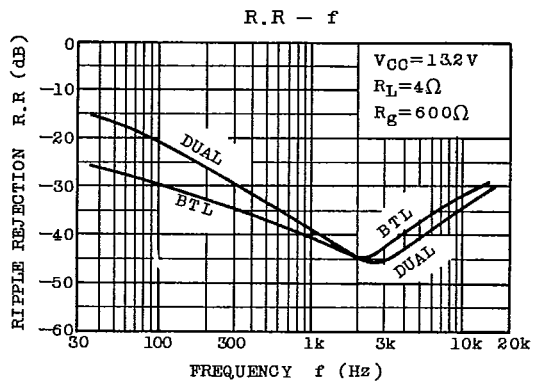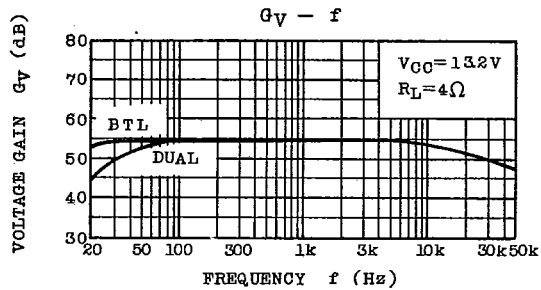


AUDIO LINEAR IC

# TA7227P

T-74-05-01

## PRINT BOARD (DUAL MODE)

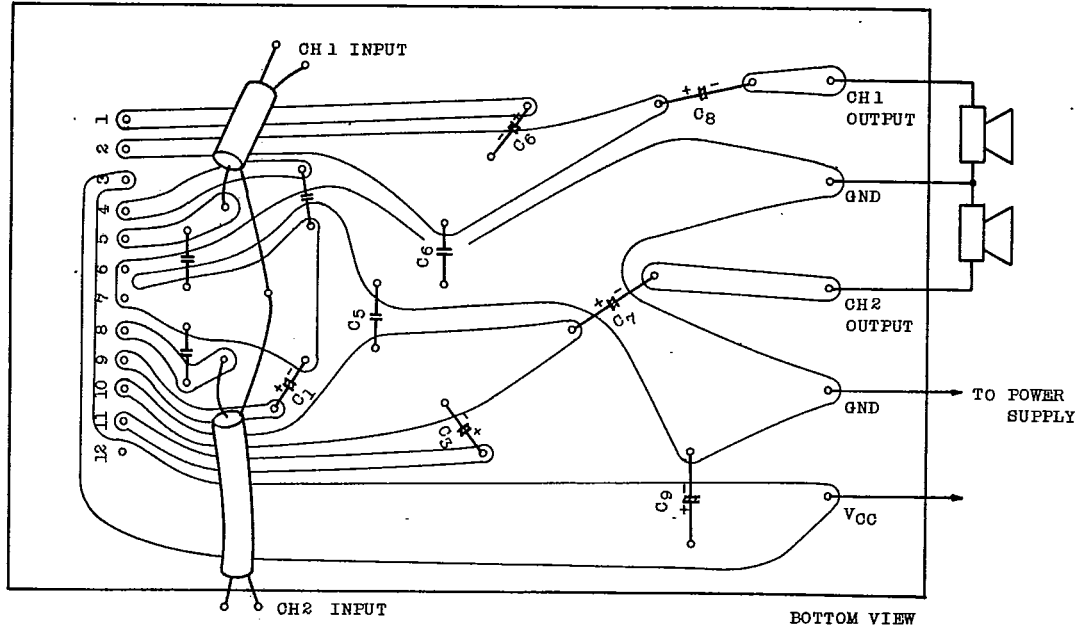

## PRINT BOARD (BTL MODE)

